
Quadrus Slim One





Quadrus Slim One $1800 \updownarrow \times 600 \leftrightarrow S1$ colour: Metallic Black

Angled integrated thermostatic valve set with immersion tube, right, chrome Integrated pipe-masking set, chrome ONE heating element

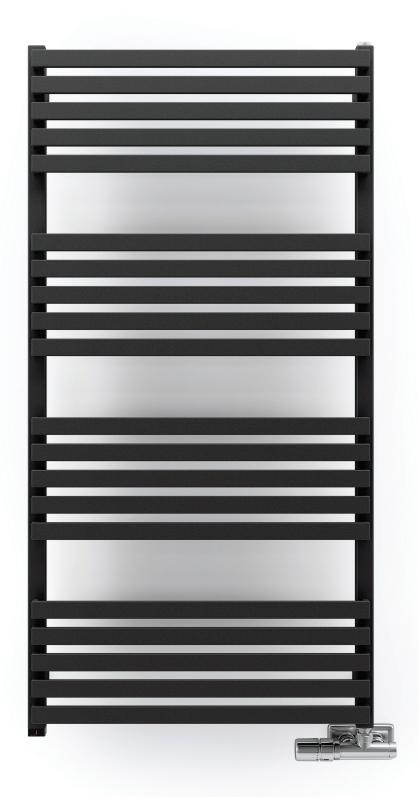





Projekt : Terma

Standard connections:


Optional connections:


P1







Available sizes:









1185 x 600

Electrical specification:

							ver suppl	230 V / 50 Hz		
							vice prote	Class I		
Specifications:						Ing	ress prote	IPx5		
Working pressure: 1000 kPa Maximum operating temperature: 82°C										
A ≎ [mm]	B↔ [mm]	75 <mark> 65 20°c</mark> [W]	55 <mark> 45 </mark> 20°c [W]	© [W]	D [mm]	E [mm]	F [mm]	[dm ³]	(kg]	Product Code configuration code p. 5
farba proszkowa										
870	450	409	217	400	420	720	75	2,53	8,81	WZQSN087045
870	600	559	296	600	570	720	75	2,96	10,81	WZQSN087060
1185	450	537	278	600	420	1035	75	3,43	11,76	WZQSN118045
1185	600	734	379	800	570	1035	75	4,00	14,43	WZQSN118060


TERMA | www.termaheat.com







Technical drawing:

S8






 $A - Height \ B - Width \ C1-C5 - Distance \ between \ pipe \ centres \ D - Horizontal \ distance \ between \ mounting \ bracket \ centres \ E - Vertical \ distance \ between \ mounting \ brackets \ F - Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$



TERMA | www.termaheat.com

S1



20190521 MałkowskiPrzemysław

Quadrus Slim One



In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a configuration code of a water radiator with a built-in One heating element:

WZQSN087045

<u>ant ()) bat ()</u>


K916S1

PRODUCT CODE (located in the table for the product) CONIGURATION CODE (supplemented by hand)

Cable Type

- W straight cable with plugP straight cable without plug
- U spiral cable with plug

Example Configuration



The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWQSN087045

PRODUCT CODE (located in the table for the product) K916E1

CONIGURATION CODE (supplemented by hand)



W – straight cable with plug
P – straight cable without plug

U – spiral cable with plug

Example Configuration




Plate color code Connection code Cable Type code

Epoxy primer

Package code

K - carton box

E – Code of epoxy primer is an extra processes.

WZQSN087045 K916S1 E Extra processes or additions code

TERMA | www.termaheat.com

Quadrus Slim One



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.