

Easy DW



Easy DW 1660↓ × 200↔ O1
colour: RAL 6010

Inline integrated thermostatic valve set with immersion tube, chrome
Integrated pipe-masking set, chrome



TERMA
SINCE 1990





colour included
in the price

Design: *Terma*


Standard connection:



Electric radiators:



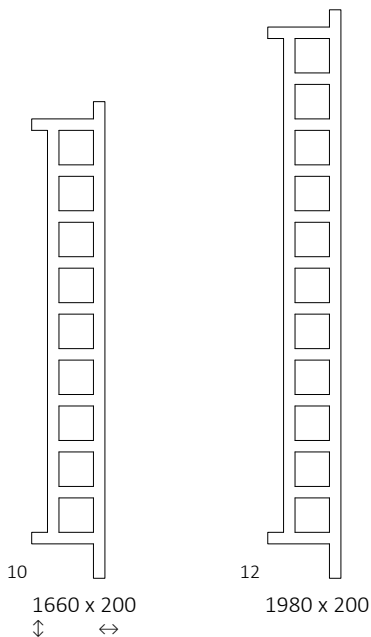


Available sizes:



Specification:


Working pressure: 800 kPa Maximum operating temperature: 95°C

A ↓ [mm]	B ↔ [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	E [mm]	F [mm]	 [dm ³]	 [kg]	Product code <small>Configuration code p. 5</small>
1660	200	314	170	300	1440	21	4,40	7,17	WGEGAW166020
1980	200	378	204	400	1760	21	5,27	8,55	WGEGAW198020




colour included
in the price

Technical drawing:

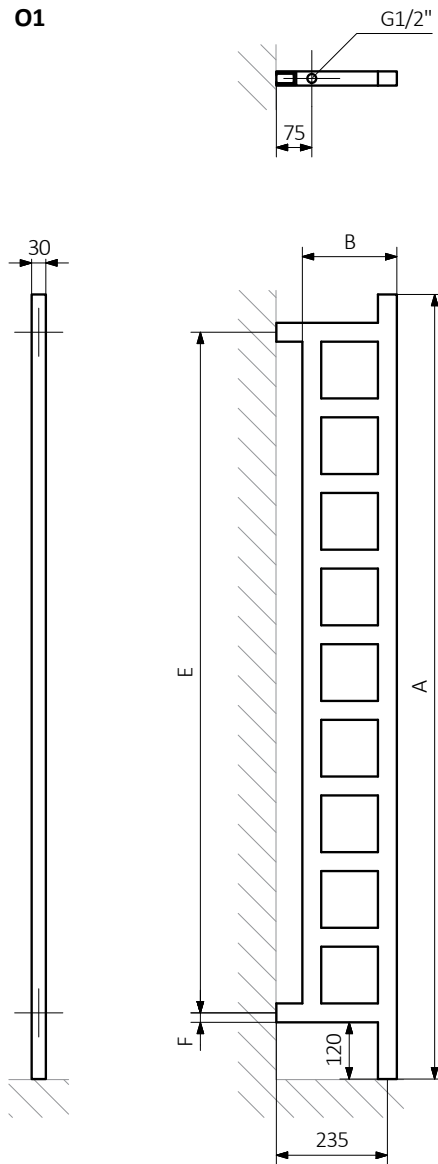

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Pipe:





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGEAW166020

K91601

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 01

Package code Colour code Connection code
K - carton box

Construction of electric heater configuration code:

WLEAW166020

K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Example Configuration

K 916 E1 DRY M

Package code Colour code Connection code Heating element code Type of heating element cable code
K - carton box

Epoxy primer

E – Code of epoxy primer is an extra processes.

WGEAW166020 K91601 **E** — *Extraprocessesoradditioncode*

Easy DW



colour included
in the price

Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



colour
included
in the price

No additional p Colour included ayment for a color.